



SPECIFICATIONS


Model Name	Z270 PC MATE
CPU support	Supports 7th / 6th Gen Intel® Core™ i3/i5/i7 processors, and Intel® Pentium® and Celeron® processors
CPU socket	LGA 1151
Chipset	Intel® Z270 Chipset
Graphics Interface	2 x PCI-E 3.0 x16 slots 2-way CrossFire
Display Interface	VGA, DVI-D, HDMI
Memory support	4 DIMMs, Dual Channel DDR4-3800(OC)
Expansion slots	3 x PCI-E x1 slots, 1 x PCI slot
SATA / M.2 / U.2	6 x SATA 6Gb/s ports, 2 x M.2 slots
Intel® Optane™	Intel® Optane™ Memory Ready
SATA RAID	RAID 0,1,5,10
USB 3.1 Gen2	2 x USB 3.1 Gen2 (Type A+C)
USB 3.1 Gen1	8 x USB 3.1 Gen1
USB 2.0	6 x USB 2.0
LAN	Intel® I219-V Gigabit LAN
Audio	7.1-Channel High Definition Audio
Form Factor	ATX

FEATURES

1. **DDR4 Boost:** Дает прирост производительности вашей DDR4 памяти
2. **Audio Boost:** Подарите себе звук студийного качества и почувствуйте настоящий HI-FI
3. **Индикатор отладки EZ Debug LED:** Легкий способ поиска неисправностей
4. **Двойной Turbo M.2:** Обеспечивает скорость передачи данных до 32Гб/с. Поддерживаются накопители Intel Optane
5. **M.2 Genie:** RAID массив из накопителей M.2 - теперь проще и быстрее
6. **Технология Lightning USB:** Удвоенная пропускная способность, поддержка USB 3.1 Gen2 Type A + Type C
7. **X-Boost:** Отличный инструмент для улучшения производительности USB накопителей
8. **Двойная защита от статического электричества:** Два слоя заземляющих контактов в монтажных отверстиях материнской платы

REAR CONNECTORS

- | | |
|----------------------------------|-----------------------------------|
| 1. PS/2 Device Port | 8. DVI-D Port |
| 2. VGA Port | 9. USB 3.1 Gen1 Type-A |
| 3. HDMI | 10. USB 3.1 Gen1 Type-A |
| 4. Intel® Gigabit LAN Port | 11. LIGHTNING USB 3.1 Gen2 Type-C |
| 5. LIGHTNING USB 3.1 Gen2 Type-A | |
| 6. HD Audio Connectors | |
| 7. USB 2.0 Device Port | |

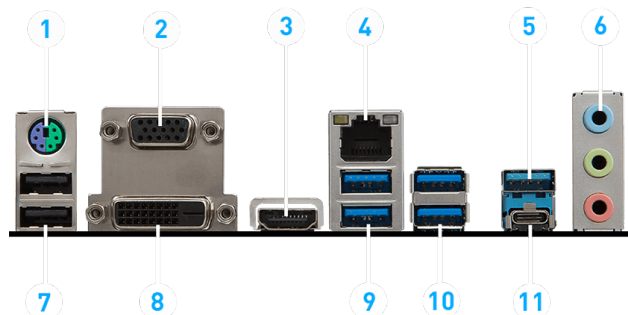

For more information check our [Product page](#)
 This datasheet was generated on Mar 17 2017

Product specifications and colors are subject to change without notice and may vary from those shown. Errors and omissions excepted.